



BALL-VALVE WITH EXTENSIONS AND DUAL PURGE PORT

SPECIFICATIONS:

All purge port isolation valves shall be an Amico **Alert-1** Series.

The Valve shall be 3 piece ball-type design with a bronze body and chrome plated brass ball for sizes 1/2" to 2-1/2", for sizes 3" - 4" the ball is stainless steel. Seats shall be Teflon (TFE) and seals Viton for 1/2" to 2-1/2" and Teflon (TFE) for 3" - 4" valves. A blow-out proof stem shall be used and the valve shall have a maximum pressure rating of 600 psi [4,137 kPa].

Valves shall be operated by a lever-type handle requiring only a quarter turn from a fully open position to a fully closed position.

Ball valves shall be equipped with type "K" copper pipe stub extensions at both the inlet and outlet sides of the valve port to facilitate installation.

Valves shall be designed in such a manner that it can be "swung-out" during installation so as to prevent damage due to heat transfer during the brazing operation.

Each valve assembly shall be washed and degreased for medical gas service. Pipe stub extensions shall be capped at both ends. The valve shall be supplied in a sealed plastic bag to prevent contamination prior to installation.

The Valve is **UL** Listed.

Amico products comply with NFPA-99.



FEATURES:


- 3 piece design for ease of maintenance
- 100% Hydrostatic tested
- Cleaned for medical gas service
- Blow-out proof stem
- Available in sizes 1/2" to 4"
- Full-Port design
- Dual port design
- Available in locking or non-locking

PROJECT:



D I M E N S I O N S

A Series
ALERT-1

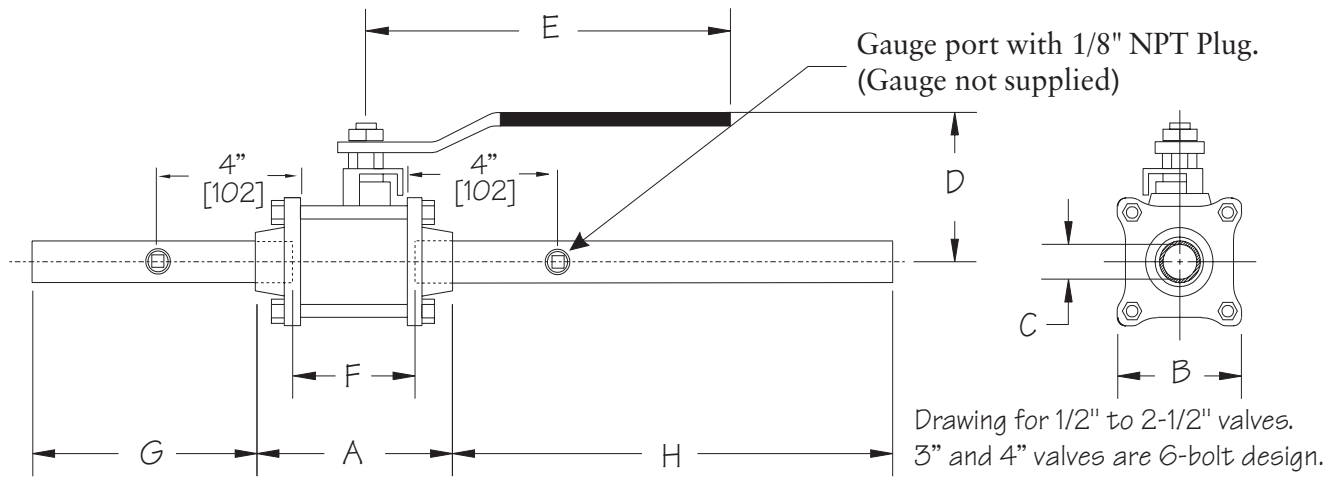

M O D E L N U M B E R S

Units of measure: inch [mm]

Model #	Size	A	B	C	D	E	F	G	H	Bolts
VV-ISO-G2-05	1/2 [13]	2-1/16 [52]	1-13/16 [46]	1/2 [13]	2-1/32 [52]	3-29/32 [99]	1-1/16 [27]	7-1/4 [184]	11-3/4 [299]	4
VV-ISO-G2-07	3/4 [19]	2-15/16 [75]	1-15/16 [49]	3/4 [19]	2-9/32 [58]	4-21/32 [118]	1-7/16 [37]	6-3/4 [172]	11-1/2 [292]	4
VV-ISO-G2-10	1 [25]	3-21/32 [93]	2-1/2 [64]	1 [25]	2-1/2 [64]	4-21/32 [118]	1-27/32 [47]	6 [152]	11-1/4 [286]	4
VV-ISO-G2-12	1-1/4 [32]	3-29/32 [99]	2-11/16 [68]	1-1/4 [32]	3-1/8 [79]	6-11/16 [170]	1-31/32 [50]	5-5/8 [143]	11-1/4 [286]	4
VV-ISO-G2-15	1-1/2 [38]	4-19/32 [117]	3 [76]	1-1/2 [38]	3-11/32 [85]	6-11/16 [170]	2-13/32 [61]	5-1/4 [133]	11-1/8 [283]	4
VV-ISO-G2-20	2 [51]	5-25/32 [147]	4 [102]	2 [51]	3-11/16 [94]	6-11/16 [170]	3-3/32 [79]	5 [127]	9-1/8 [232]	4
VV-ISO-G2-25	2-1/2 [64]	6-15/16 [176]	5 [127]	2-1/2 [64]	4-11/16 [119]	8 [203]	4 [102]	12 [305]	12 [305]	4
VV-ISO-G2-30	3 [76]	8-1/2 [216]	7-11/16 [195]	3 [76]	5-9/16 [141]	18 [457]	5-3/16 [132]	11-7/8 [302]	11-7/8 [302]	6
VV-ISO-G2-40	4 [102]	11 [279]	10-1/4 [260]	4 [102]	6-3/4 [172]	18 [457]	6-11/16 [170]	19-7/8 [505]	19-7/8 [505]	6

NOTE: To order with locking device, add the letter "L" after the current "G2" to any part number. For example, VV-ISO-G2L-05.

D I S T R I B U T E D B Y :